



DOWNDRAFT TABLES

3636DTM & 3672DTM

(Grinding & Polishing of Metal)

The most innovative and efficient tables on the market

- Advanced self-opening tabletop offering immediate access to filters
- Unique recessed base for workers comfort
- Revolutionary design using dual inlet blowers generating over 1800 CFM
- Super quiet blower design operating under 78dB



3636DTM (with grill option)



3672DTS (with matt option)

Specifications

DOWNDRAFT TABLES	3636DTM	3672DTM
Dimensions (W x L x H)(in.)	36'' x 36''x 36''	36'' x 72''x 36''
Panel filter efficiency	98.00 %	98.00 %
Electrical power requirement	240/120V (L1,L2,N) 208/120V- (L1,L2,L3,N) 15 Amps	240/120V (L1,L2,N) 208/120V- (L1,L2,L3,N) 20 Amps
Auxiliary electrical outlet	2 X 115V - 1Ø	4 x 115V - 1 Ø
Blower motor HP	1 x ¾ HP	2 x ¾ HP
CFM	1800	2 x 1800
Sound pressure dB (at 10')	74	78
Weight for shipping (lbs)	300	550

Options

- Filter pressure gauge
- Filter Cleaning hood



Tabletop Features

Innovative anti-slip and non-scuffing mats: These indestructible half-inch thick mats secure parts in place and protect work from denting.


Ergonomic: Special recessed base design offers foot clearance for workers comfort. The tabletop surface is accessible from 360° around.

Ease of maintenance: The gas-cylinder assisted tabletop is fully counter balanced and auto-blocking for easy opening with one hand. This unique feature gives easy access to filters and inner chamber for maintenance.

Filter Features

Innovative design: Filters act as dust trays to capture 100% of collected dust particles. They can be easily cleaned and replaced in less than one minute!!

Flexible concept: Can integrate a variety of panel filter types and thicknesses that can be selected to optimize both filtration performance and durability for your application.

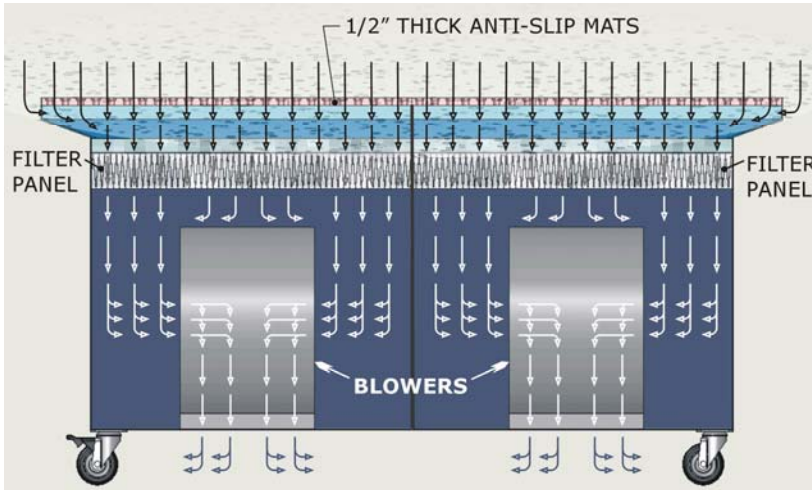

Blower Features

Blowers are located on the clean side of filters for trouble free extended life. This feature also permits the use of a new generation of direct drive, high efficiency and super quiet blowers which generate 25% more suction with 25% less horsepower, thus saving energy.

Each blower is located in a separate compartment within the base area making it possible to individually operate either side of the table in a pull configuration (3636DT table has only one blower). This airflow design generates an even suction distribution all the way to the edges.

GUARANTY

All BELFAB manufactured equipment carry one-year guaranty

* BELFAB improves its product continuously and may change the specifications without notice

Distributed by:



Belfab

430 Guimond, Longueuil, QC, CANADA J4G 1P8

Tel: (450) 463-3344 Fax: (450) 463-3252

Toll free: 1-866-423-5322

1-866-423-4BELFAB

Web site: www.belfab.net

E-mail: sales@belfab.net