

JJ Dust Collector 2 HP/1000 CFM

The "JJ" model is an industrial small capacity dust collector system equipped with a 2 HP blower generating over 1000 CFM, available in single or three phases electrical connection.

This collector is designed to collect dust particles ranging from coarse to mixed sizes, generated by wood machines operating in intermittent or continuous fashions and producing moderate dust loads.

The JJ unit integrates a high performance industrial blower with top of the line filter bags offering an efficiency of 98.98% @ 0.5 micron.

At less than 7 feet high with a foot print less than 4 square feet, the compact design of the JJ makes it ideal for applications where space is a premium.

The JJ unit is generally recommended for applications involving one or two machines in a small shop environment or in larger facilities where there is a need for an industrial "stand alone solution".



Note: the JJ unit comes standard with top and bottom filter bags

SPECIFICATIONS

Filtration surface (sq. ft.)	32
Dimensions (W x D x H) (in.)	21"x 29"x80"
Module weight (lbs)	120
Disposal capacity cu/ft	7

Blower Motor (HP)	2
Capacity (CFM)	1080
Sound pressure (dB)	81
Inlet diameter (in.)	6

FEATURES

- Rapid assembly & installation
- Compact configuration offering a small footprint
- Low maintenance direct drive centrifugal fan
- High efficiency TEFC motor, UL & CSA approved
- High efficiency needle felt filter bag (1/8" thick)
- Comes standard with top and bottom filter bags
- Quick release clamp

OPTIONS

- Single phase 240V motor comes standard with a manual starter, 5' cable and plug
- Three phase 208/240/460/600V motor requires a magnetic starter (not included with unit)


GUARANTY

All BELFAB manufactured equipment carry one-year guaranty

* BELFAB improves its product continuously and may change the specifications without notice

Distributed by:

J SERIES PERFORMANCE CURVES

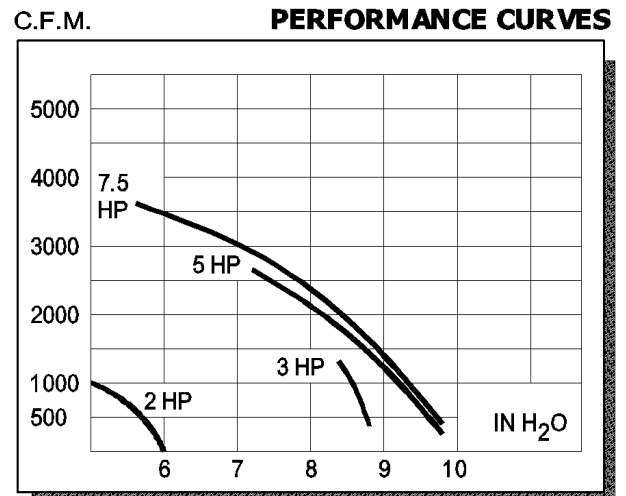

Note: if your installation develops less static pressure than the minimum indicated on this chart, slide gate restriction should be added in order not to exceed recommended maximum motor amperage.

Belfab

430 Guimond, Longueuil, QC, CANADA J4G 1P8

Tel: (450) 463-3344 Fax: (450) 463-3252

Toll free: 1-866-4BELFAB

1-866-423-5322

Web site: www.belfab.net

E-mail: sales@belfab.net